



Product Information Bulletin

Terol[®] 256 – Aromatic Polyester Polyol

Description


Terol[®] 256 is a modified aromatic polyester polyol.

Application

Terol[®] 256 is recommended for use in all PUR systems. High functionality of Terol[®] 256 facilitates replacement of a significant amount of polyether polyol in formulation. Introduction of this polyol in a PUR formulation enhances fire resistance due to high aromatic content, and a reduction in fire retardant level can be realized.


Specifications

OH, mg KOH/g	255-275
Water, % by wt. Max	0.10
Acid No. mg KOH/g	0.7-2.2
Viscosity @ 25°C	10000-14000

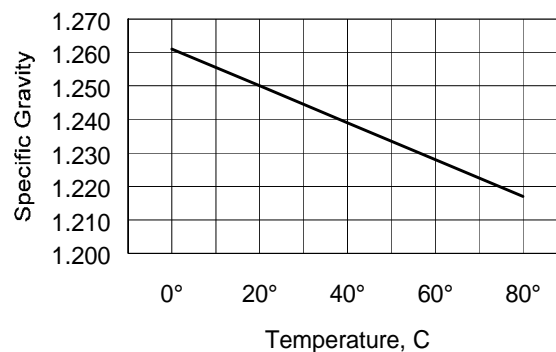

Typical Properties

Specific Gravity @ 25°C	1.247
Viscosity @ 25°C	12000
Functionality	2.30
OH, mg KOH/g	265
Equivalent Weight	215.8

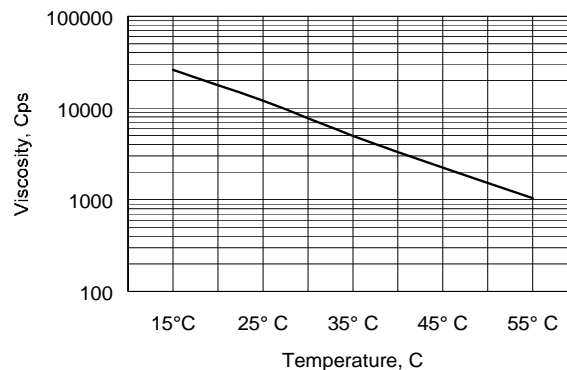

Storage and Handling

As with all industrial chemicals, care should be exercised in the handling of this material. In the event of contact with skin or eyes, follow the instructions on our MSDS. Terols should be stored in tightly closed containers. Storage temperatures of 15-50°C are recommended for a shelf life of six months.

OXID L.P. 101 Concrete Street Houston, TX USA 77012 +1 713 924-6400 fax +1 713 924-6417 www.Oxid.net
Customer Service +1 713 924-6401 fax +1 713 923-7922 email: CustomerService@Oxid.net

The technical information presented herein is based on actual test results performed by OXID, but should only be used as a guideline of typical chemical and physical properties. Individual conditions of use and application of our products, including any suggested formulations and recommendations, are beyond our control. It is imperative that you test our products to determine to your own satisfaction whether they are suitable for your intended uses and applications.