



Product Information Bulletin

Terol[®] 305 – Aromatic Polyester Polyol

Description


Terol[®] 305 is a modified aromatic polyester polyol.

Application

Terol[®] 305 is recommended for use in PUR Spray and PIP Systems where the blowing agent is 245fa and/or water.


Specifications

OH, mg KOH/g	285-315
Water, % by wt. Max	0.15
Acid No. mg KOH/g	0.5-1.5
Viscosity @ 25°C	5000-6000

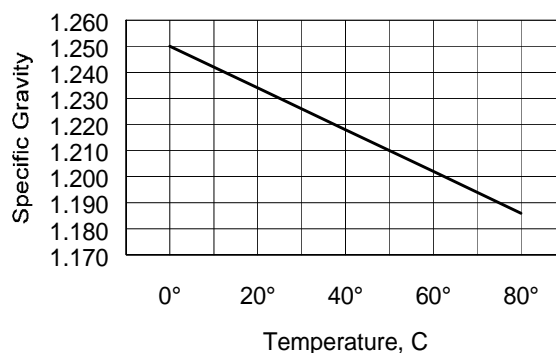

Typical Properties

Specific Gravity @ 25°C	1.246
Viscosity @ 25°C	5500
Functionality	2.20
OH, mg KOH/g	305
Equivalent Weight	187

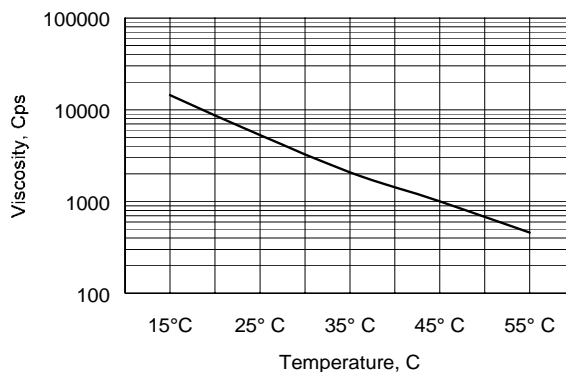

Storage and Handling

As with all industrial chemicals, care should be exercised in the handling of this material. In the event of contact with skin or eyes, follow the instructions on our MSDS. Terols should be stored in tightly closed containers. Storage temperatures of 15-50°C are recommended for a shelf life of six months.

OXID L.P. 101 Concrete Street Houston, TX USA 77012 +1 713 924-6400 fax +1 713 924-6417 www.Oxid.net
Customer Service +1 713 924-6401 fax +1 713 923-7922 email: CustomerService@Oxid.net

The technical information presented herein is based on actual test results performed by OXID, but should only be used as a guideline of typical chemical and physical properties. Individual conditions of use and application of our products, including any suggested formulations and recommendations, are beyond our control. It is imperative that you test our products to determine to your own satisfaction whether they are suitable for your intended uses and applications.